


POWER RELAY

2 POLE 5A/TV-3 RATED COMPACT TYPE

FTR-F4 Series

■ FEATURES

- Small high density type relay 288mm² save 24% compared to VB
- UL/CSA/VDE/SEMKO/CQC approved
- Insulation distance: minimum 6 mm between coil and contacts IEC60065
Dielectric strength: 4 KV
Surge strength: 10 KV
- Card separation system for high noise resistance between coil and contacts
- Flux proof type, RTII
- RoHS compliant
Please see page 6 for more information

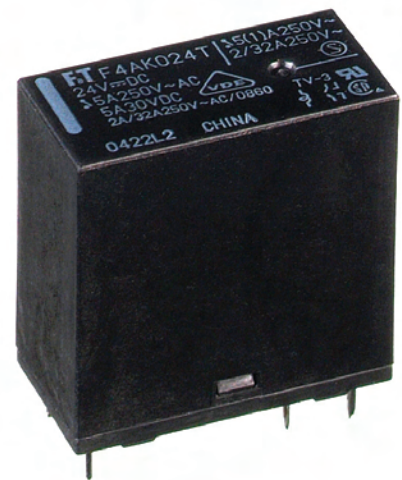

■ APPLICATIONS

- CRT monitor EMI protection
- Audio system speaker protection

■ PARTNUMBER INFORMATION

[Example] FTR-F4 A K 012 T - **
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-F4 : FTR-F4 Series
(b)	Contact configuration	A : 2 form A (DPST)
(c)	Coil type	K : Standard type (530mW)
(d)	Coil rated voltage	012 : 5...48VDC Coil rating table at page 3
(e)	Contact material / TV type	T : TV 3; AgSnO ₂
(f)	Special type	** : Customer specific type designation

Actual marking does not carry the type name : "FTR"
 E.g.: Ordering code: FTR-F4AK012T Actual marking: F4AK012T

FTR-F4 SERIES

■ SPECIFICATION

Item	FTR-F4		
Contact Data	Configuration	2 form A (DPST-NO)	
	Construction	Single	
	Material	Silver alloy (AgSnO ₂)	
	Resistance (initial)	Max. 100 mOhm at 1 A, 6 VDC	
	Contact rating (resistive)	5A, 250VAC, 30VDC	
	Max. carrying current	5A	
	Max. switching voltage	400 VAC / 300VDC	
	Max. switching power	1,250 VA / 150W	
	Max. switching current	5A	
	Min. switching load *	100mA, 5 VDC	
	Max. inrush current	120VAC, 51A (TV-3)	
Life	Mechanical	Min. 2 x 10 ⁶ operations	
	Electrical	Contact rating	Min. 100 x 10 ³ operations
		Lamp load (TV-3)	Min. 25 x 10 ³ operations
Coil Data	Rated power	530mW	
	Operate power	300mW	
	Operating temperature range	-40 °C to +70 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 15ms (without bounce)	
	Release (at nominal voltage)	Max. 5ms (no diode)	
Insulation	Resistance (initial)	Min. 1,000MOhm at 500VDC	
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min
		Contacts to coil	3,000VAC (50/60Hz) 1min
		Adjacent contacts	4,000VAC (50/60Hz) 1min.
Surge strength	Coil to contacts	10,000V/ 1.2 x 50µs standard wave	
Other	Vibration Resistance	Misoperation	10 to 55Hz double amplitude 1.5mm
		Endurance	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation	200m/s ² (11±1ms)
		Endurance	1,000m/s ² (6±1ms)
	Weight	Approximately 12g	
	Sealing	Flux proof, RTII	

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-F4 SERIES

■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Rated Power (mW)
005	5	47	3.75	0.25	530
006	6	68	4.5	0.3	
009	9	155	6.75	0.45	
012	12	270	9.0	0.6	
024	24	1,100	18.0	1.2	
048	48	4,400	36.0	2.4	

Note: All values in the table are valid for 20°C and zero contact current.

* Specified operate values are valid for pulse wave voltage.






■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508	Flammability: UL 94-V0 (plastics)
	E63614	5A, 277VAC/30VDC (resistive) 1/6 HP, 125VAC
CSA	C22.2 No. 14 LR 40304	1/4 HP, 277VAC Pilot duty: C300 TV-3 120VAC
VDE	0435, 0860 40015180	5A, 250VAC (cos φ 1) 50K 2A, 250VAC (cos φ 0.4) 100K 5A, 30VDC (0msec) 100K




Complies with CQC, SEMKO

FTR-F4 SERIES




CHARACTERISTIC DATA

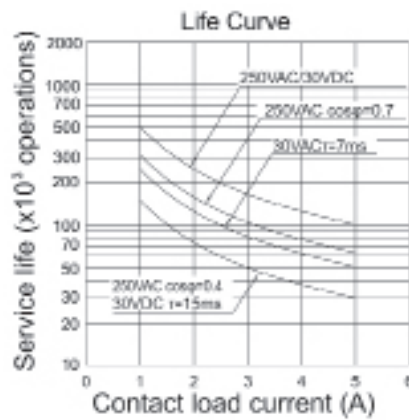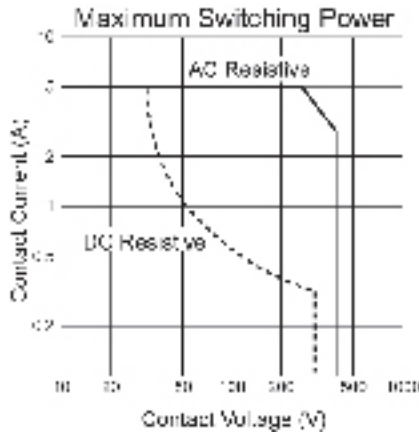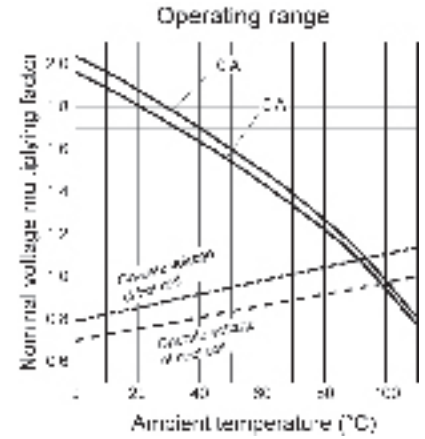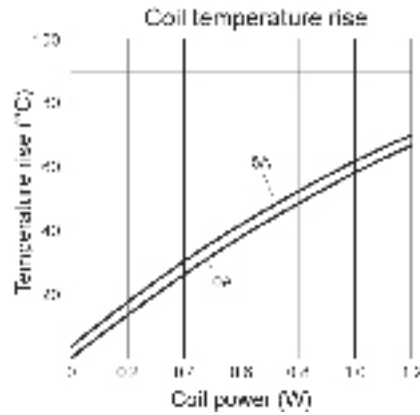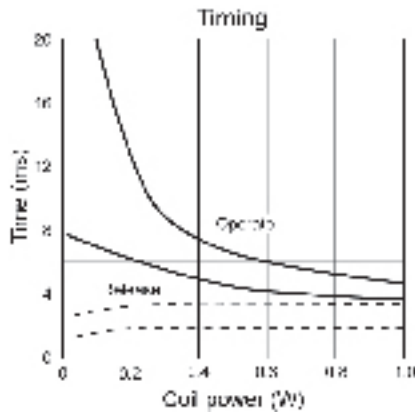

REFERENCE DATA

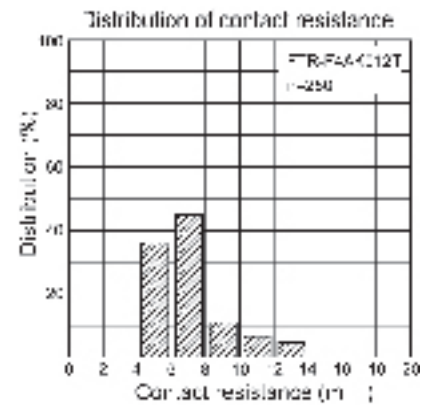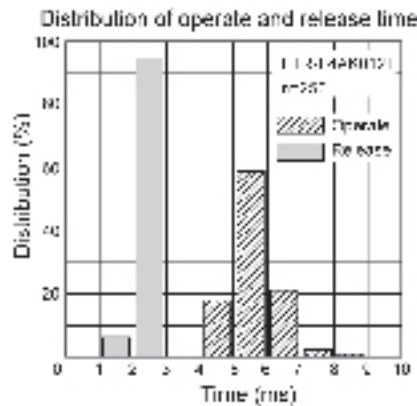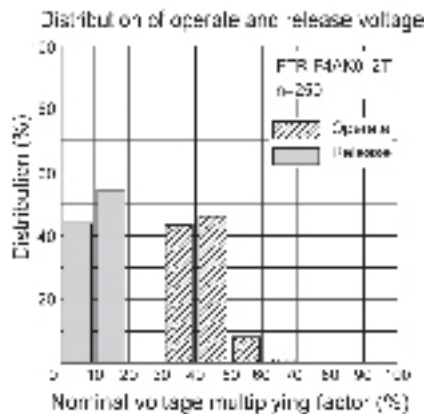


FTR-F4 SERIES

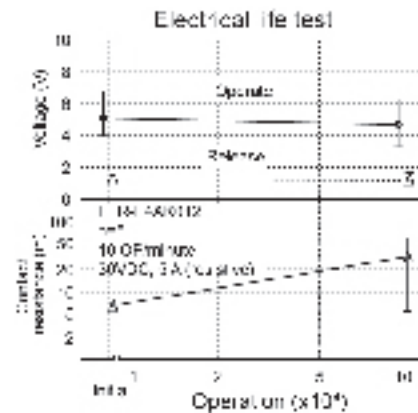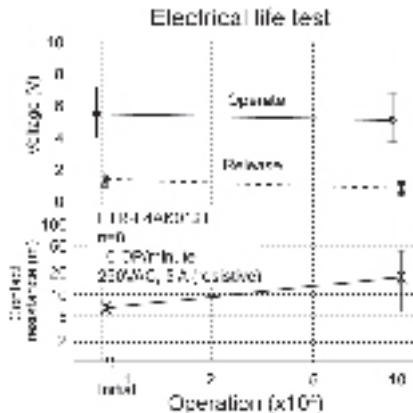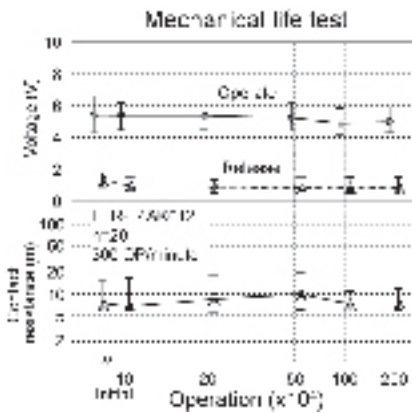


■ DIMENSIONS

- Dimensions


FTR-F4 type

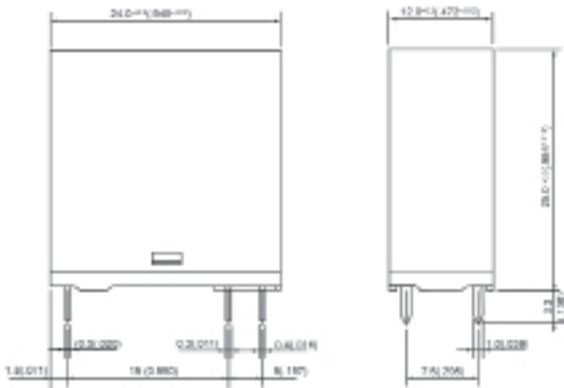

- Schematics (BOTTOM VIEW)



- PC board mounting hole layout (BOTTOM VIEW)

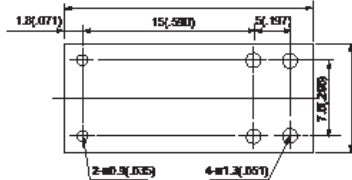

Unit: mm (in.)

RoHS Compliance and Lead Free Information

1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2010 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 22, 2010